




■ **POWERLUX™ (SI3)**

- Safe, Bright LED TrueWhite™
- Low energy, Long Life
- Multi-voltage (10v to 32v)
- Ultra slim profile
- IP67 rating

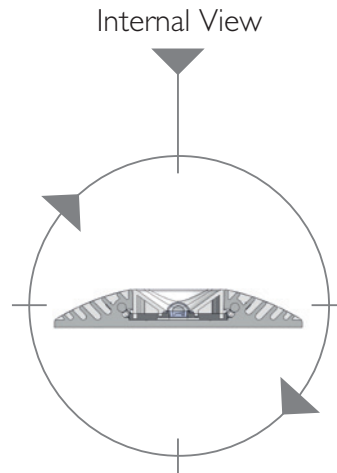


|| See technical specifications overleaf >>>

POWERLUX™ (SI3)



- **LED TrueWhite™ technology** produces a clean white light, resembling natural daylight and creating a safe working environment. The Powerlux will comfortably provide you with 20lux – the minimum suggested level for lighting at work. Three light levels available to suit your application and budget.
- **70% less energy than tungsten and more than 50 times longer life** means you save maintenance costs and vehicle downtime.
- By using the best LEDs available we ensure you get the best performance and reliability in the market.
- **Low profile design (17mm)** and contoured shape designed for surface mounting in the load area without obstructing dividers. Installation is quick and easy.
- **IP67 rated** allowing for pressure washing and challenging environments such as refrigerated vehicles.

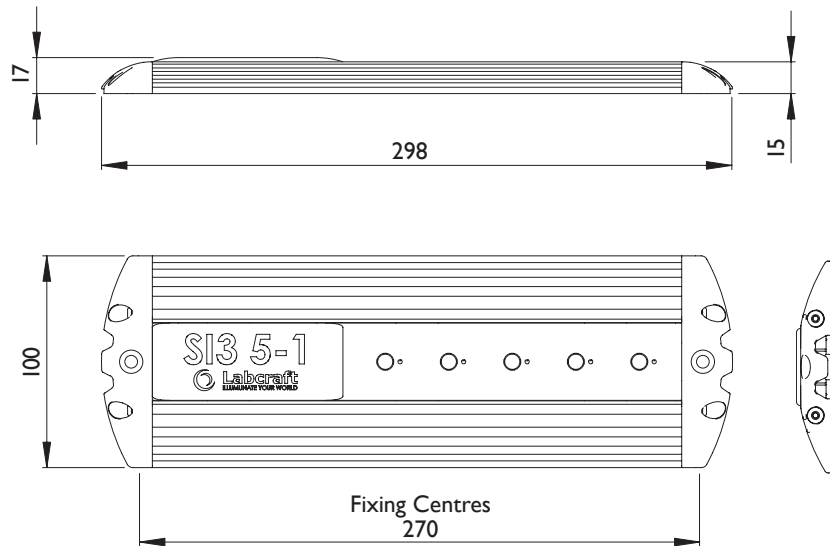

SPECIFICATION

ALL DIMENSIONS HAVE A TOLERANCE OF +/- 1mm

POWERLUX
(SI3)

Model No		SI3_5-1E	SI3_5-1	SI3_5-3
Voltage Range	Vdc	10 to 32	10 to 32	10 to 32
Average Current	A	12V = 0.67A, 24V = 0.32A	12V = 0.67A, 24V = 0.32A	12V = 1.25A, 24V = 0.6A
Illuminance	LUX	235 @ 1m, 50 @ 2.6m	275 @ 1m, 60 @ 2.6m	464 @ 1m, 102 @ 2.6m
Total Lumen Output	Lm	330	500	875
LEDs	W	5 x 1.25W = 6.25W	5 x 1.25W = 6.25W	5 x 2.5W = 12.5W
Weight	Kg	0.46	0.46	0.46
Temp. Range	°C	-30 to +40	-30 to +40	-30 to +40

E & OE