

APOLLO



Choice of lighting levels up to 3400 lumens; over 750 lux @ 1 metre



Integrated switch & 5-minute PIR sensor/switch options



Choice of 3 light angles



Quick and easy to install



ECE-R10 approved



TECHNICAL SPECS OVERLEAF 
APRIL 2023



DESIGNED FOR MULTI-SECTOR APPLICATIONS




APOLLO

Long life, high intensity Cree LEDs - The Apollo uses the latest in LED technology, offering optimum performance and extended life. The Apollo has been designed to offer a choice of up to 24 LEDs per 250mm, 48 LEDs per 500mm, and 96 LEDs per 1000mm LED strip, to substantially increase light output.

Integrated switch option - The Apollo can be switched remotely or is available with an integrated on/off rocker switch. A 5-minute PIR* switch option is also available to enable automatic switching.

Choice of 3 different light angles - The internal LED strip can be positioned in 3 different angles to direct the light exactly where it is needed. Angle to be specified at point of order.

Quick and easy to install - The Apollo is simply fixed into place by the end caps, making it suitable for both new vehicle specifications and retrofitting into existing vehicles.

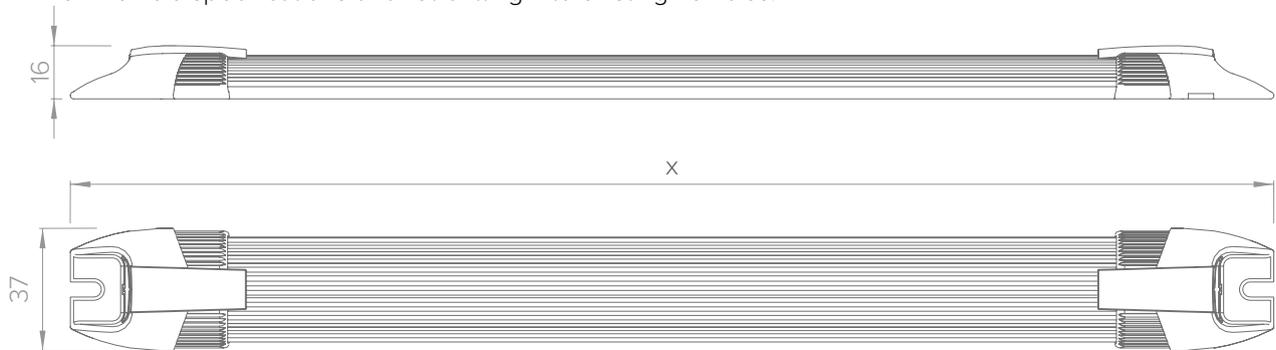

X LENGTHS: SVCW250 = 360MM - SVCW250PIR = 400MM | SVCW500 = 610MM - SVCW500PIR = 650MM | SVCW1000 = 1110MM

SPECIFICATION		ALL DIMENSIONS HAVE A TOLERANCE OF +/-1mm			
	12VDC	SVCW250 (12 LED - 12V)	SVCW500 (24 LED - 12V)	SVCW1000 (48 LED - 12V)	
Voltage Range	VDC	10-14	10-14	10-14	
Average Current	A	0.24	0.44	1.0	
Light Output	lm	425	850	1700	
Watts	W	3W	6W	12W	
Weight	kg	0.08	0.13	0.26	
Temp. Range	°C	-30 to +40	-30 to +40	-30 to +40	
IP Rating	IP	IP50	IP50	IP50	
	24VDC	SVCW250/2 (12 LED - 24V)	SVCW500/2 (24 LED - 24V)	SVCW1000/2 (48 LED - 24V)	
Voltage Range	VDC	20-28	20-28	20-28	
Average Current	A	0.12	0.22	0.5	
Light Output	lm	425	850	1700	
Watts	W	3W	6W	12W	
Weight	kg	0.08	0.13	0.26	
Temp. Range	°C	-30 to +40	-30 to +40	-30 to +40	
IP Rating	IP	IP50	IP50	IP50	

E & OE | Calculations based on average LED values @ 13.2V (for 12V models) and @ 26V (for 24V)

* PIR versions = 3 year warranty

