

MEGALUX



708 & 1248 lumens; over 350 & 600 lux @ 1 metre



Multi-voltage (10-32V)



Waterproof to IP66



Low profile surface mount and recessed options



E-type approved



(surface mount)

TECHNICAL SPECS OVERLEAF
MARCH 2017



DESIGNED FOR MULTI-SECTOR APPLICATIONS



10 YEAR WARRANTY



BRIGHTER
X2



E-TYPE APPROVED



MADE IN THE UK



MEGALUX


Choice of 708 & 1248 lumens - High output Cree LED technology produces a clean white light and creates a safe working environment, providing over 350 lux (4-1) and over 670 lux (4-3) @ 1 metre.

Multi-voltage (10-32V) - Engineered to suit a broad range of vehicles and voltages; the circuit can withstand changes in voltage and will provide consistent light output.


Waterproof to IP66 - The Megalux is suitable for installation in a variety of environments, including refrigerated vehicles.

Low profile designs - At just 14mm deep for the surface mount version and only 3mm for the recessed unit, these lights can be fitted in a multitude of applications.

MEGALUX RECESSED (PD2)

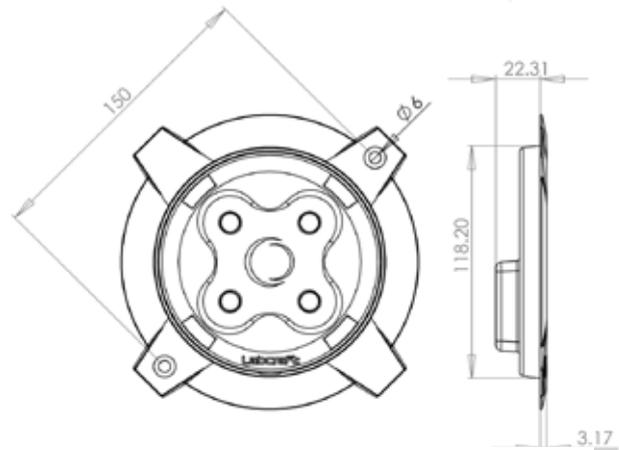

MEGALUX (PD1)

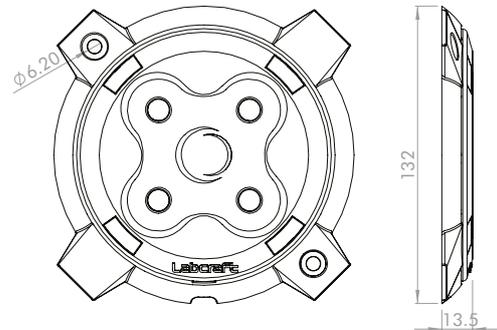

SPECIFICATION

ALL DIMENSIONS HAVE A TOLERANCE OF +/-1mm

		PD_4-1MV (12V)	PD_4-3MV (12V)	PD_4-1MV (24V)	PD_4-3MV (24V)
Voltage Range	VDC	10-32	10-32	10-32	10-32
Average Current	A	0.48	0.9	0.26	0.54
Light Output	lm	708	1248	708	1248
Watts	W	5W	10W	5W	10W
Weight	kg	0.15	0.15	0.15	0.15
Temp. Range	°C	-30 to +40	-30 to +40	-30 to +40	-30 to +40
IP Rating	IP	IP66	IP66	IP66	IP66

E & OE

